

The 8BMGT, designed and developed by EIGHT BELLS is an advanced gimbal-mounted camera capturing the infrared thermal radiation emitted by objects and humans. It requires no ambient light and operates during day and night under any weather conditions. The 8B THERMAL CAMERA supports video analytics and can be used for both ground and maritime applications.



APPLICATIONS

Reconnaissance, border patrol, migration flows control



SAR (Search & Rescue) applications in sea



Critical infrastructure Protection (ports, airports, factories, photovoltaic / wind farms)



Fire fighters forest patrol / fire detection in warehouses





DIMENSIONS



SPECIFICATIONS*

SYSTEM	
Digital / Analog (option upon	
Video Output	request)
Humidity and dust protection	requesty
level	IP66
Material	Fiber Reinforced Plastic
Standard	
0.00.7.0.0.7.0.	MLT-STD-810G
Operation temperature	-30 °C - +70 °C
Input voltage	24VDC
Communication protocol	RS232/ RS485/RS422 (upon
	request any other serial
	protocol)
THERMAL CAMERA	
Sensor type	Uncooled
Spectral response	8-12μm
Sensor resolution	640x480, 17μm (12μm
	available, upon request)
NETD	<50 mK
Refresh rate	30 Hz (60 Hz upon request)
Lens	35mm, f#1.1
Digital Zoom	2x, 4x
Field Of View (FOV)	18° x 13°
DAY CAMERA (Optional)	
Sensor	Full HD 1920x1080
Lens	5.1mm – 51mm
Optical zoom	10x
Field Of View (FOV)	6.7° – 68°
GIMBAL (2 axis stabilization)	
Azimuth	360° continuous
Elevation	-90° / +40°
LAZER RANGE FINDER (LRF) (Optional)	
Wavelength	1550nm (eyesafe)
Max Range	4.5Km (2.2 Km NATO target)
Accuracy	0.01 – 0.5m
# E U	


^{*} Fully customizable configuration upon request

AUTO TRACKING SYSTEM





GRAPHICAL USER INTERFACE (GUI)

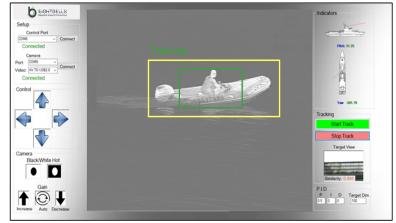

RANGE PERFORMANCE

